



### Application

- Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable for small living water supply, automatic water sprinkler system, small air conditioner system or supporting equipment etc.


### Pump

- Special anti-rust treatment for cast iron pump body and support
- Brass impeller
- ANSI 304 shaft
- Max. liquid temperature: +40°C
- Max. suction: +8 m

### Motor


- C&U bearing
- Motor with copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Protection class: IPX4
- Max. ambient temperature: +40°C

### Identification Codes

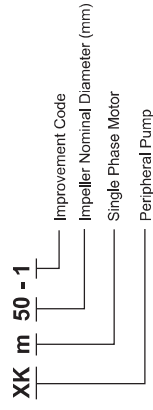

### Technical Data


MODEL	POWER		Q (m <sup>3</sup> /h)		Q (l/min)		H (m)	
	kW	HP	0	0.3	5	10	15	20
XK m 50-1	0.11	0.15	23	19	15	11	7	3

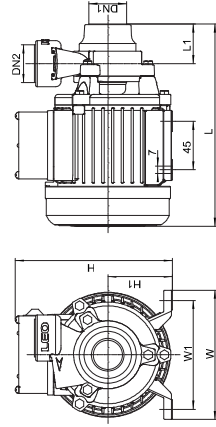

### Dimension


MODEL	DN1	DN2	L	L1	H	H1	W	W1	V1
XK m 50-1	1"	1"	186.5	36	146	60	120	100	100

### Hydraulic Performance Curves

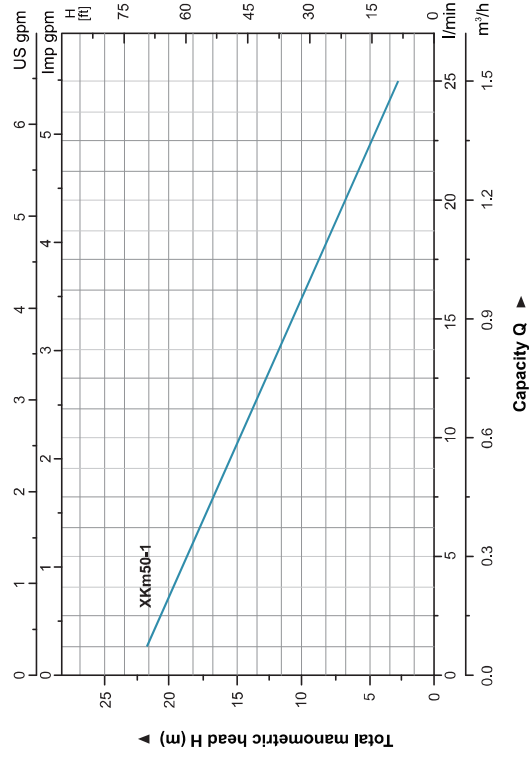

### Materials Table

No.	Part	Material
1	Pump body	HT 200
2	Impeller	Brass
3	Mechanical seal	Carbon/Ceramic
4	Coupling	NER
5	Support	HT 200
6	Bearing	
7	Rotor	
8	Fan cover	PP
9	Fan	PP
10	Terminal box	PC/ABS
11	Capacitor	
12	Stator	
13	Filling plug	HP354

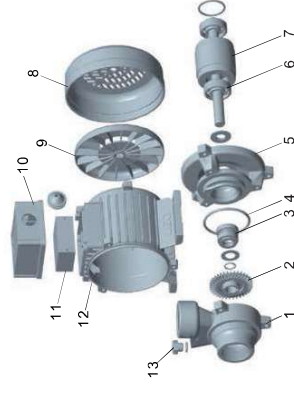

### Package Information

Model	GW (kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20 TEU)
XK m 50-1	3.6	200	140	160	4680

